


IllumaPrint Panel & Driver Sizes

IllumaPrint panels are available in various sizes.

Standard Panel Sizes

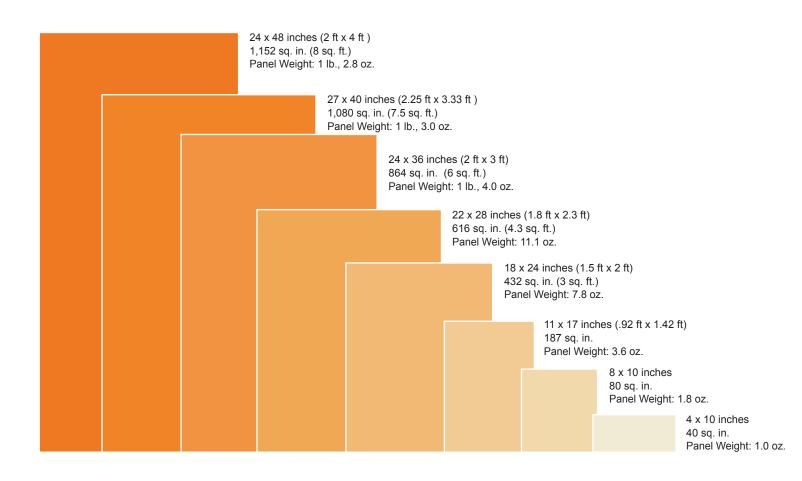

All panels include power drivers specifically designed for each IllumaPrint panel size.

What do you get with each IllumaPrint panel?

- IllumaPrint panels exist as a "plug and play system."
- Each purchase is delivered with:

 IllumaPrint panel, power cord and a corresponding AC driver.

 Note: the 4" x 10" panel is delivered with a DC driver and requires a 9V battery (must be purchased separately).
- Each AC or DC driver is designed to fit a specific panel size.
- Custom sizes/shapes of IllumaPrint panels are available upon request.

Lumens is the output of light

Size	Minimum Lumens	Average Lumens	Maximum Lumens
4x10 inches	320	345	377
8x10 inches	423	488	540
11x17 inches	309	332	368
18x24 inches (1.5 ft x 2 ft)	545	697	732
22x28 inches	570	615	660
24x36 inches (2 ft x 3 ft)	381	412	434
27x40 inches	208	261	316
24x48 inches (2 ft x 4 ft)	390	414	448









Panel Dimensions & Weights

Panel Size

Note: These images may not be exact representations of the actual products.









Life Span: Panel Life: 80,000 - 100,000 hours

Warranty: 15 Day Limited Manufacturers' Warranty for IllumaPrint drivers and panels. *See Warranty for more information.

Sizes and Shapes: In addition to standard sizes, custom sizes and shapes are available upon request. *Restrictions may apply.

Panel Operating Temperature: Ranges from 80°F to 100°F. There is no heat buildup.

Panel Bending: Panel is flexible and can bend freely. *Long exposure to bends can cause distortion. 90° crease can damage panel or limit light output.

Lead Bending: Lead cannot be bent or creased past 90°.

Power Resources: DC 3V to 24V and or AC110/115V.

Operating Power: Low power consumption. Approximately 0.0625 watts per sq. ft.

Water Resistant: Panel is water resistant. *Do not get the driver or panel lead wet.

Heat Tolerance: Ranging from (-15°) – 200°F.

Manufactured In: United States